

# Chamaeleon Deco 2




Standard Oyster Light D2-CHAM

## Installation Instructions



NOTE: All electrical work must be carried out by a licensed electrician as per the latest AS 3000 wiring regulations.  
WARNING: All maintenance is to be performed by the supplier, a service agent or qualified person.  
De-energize all supplies before maintenance. This luminaire contains non-user replaceable lamps.  
The luminaire must be operated within its specified operating parameters and in accordance with our warranty requirements.  
These documents are available on our website . This fitting is rated IP44 and must not be mounted in locations exposed to rain and high humidity.  
This fitting will operate as a motion sensor fitting, the motion sensor can not be disabled.

## MOUNTING THE FITTING

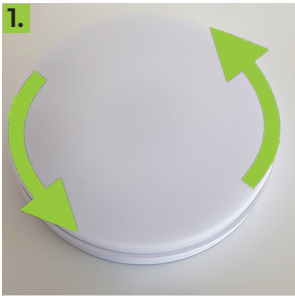

1. Remove diffuser by rotating it off



2. Feed cables through the base and mount the base to the ceiling. Alternatively the conduit entries on the side may be used. If there is an earth wire, it should be terminated.



3. Connect wires into push terminals. Neutral wire into terminal marked with "N", active wire into terminal marked with "1". Do not connect active wire into terminal "2".



4. Ensure cables do not cover the LEDs.




5. (1) Microwave sensor settings  
(2) Power settings  
(3) Colour temperature  
For details refer below.



6. Twist the diffuser back onto the base.

## DIMENSIONS

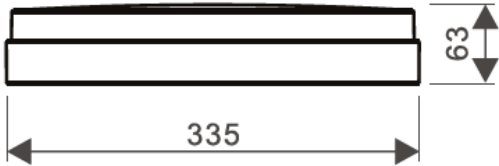

Cleaning  
To clean the fitting use a damp soft cloth. Do not use chemical cleaning products.

Key Luminaire Specifications					
Model	Version	Power Rating	Ambient Temperature	Emergency Classification	Battery
D2-CHAM	Sensor	220-240V 50/60Hz, 15W	0°C to +40°C	N/A	N/A
D2-CHAM-E	Sensor Emergency	220-240V 50/60Hz, 16W	0°C to +40°C	Maintained, emergency classification: D40	3.2V 3000mAh LiFePO4

# Chamaeleon Deco 2




Standard D2-CHAM

## Installation Instructions

### ADJUSTING THE COLOUR TEMPERATURE


The colour temperature of this fitting can be set to 3000K (warm white) or 4000K (neutral white). The default setting is **4000K**.

To change the colour temperature, set the dipswitch to the desired setting. This should only be done with power to the fitting switched off.

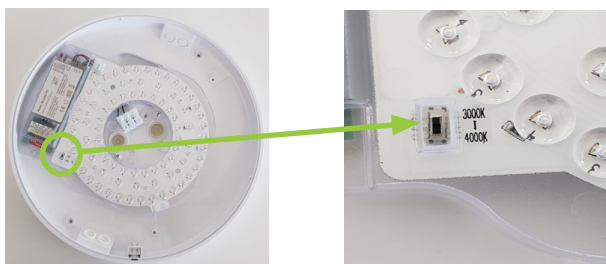


### ADJUSTING THE FULL LIGHT OUTPUT

The full light output of the fitting can be changed from 100% to 70% or 50%. The default setting is 100%. To change the setting, adjust the dipswitches as shown below. This should only be done with power to the fitting switched off.

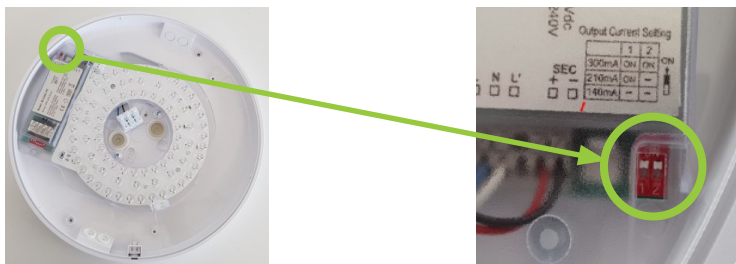

Full Light Output		
Dipswitch	1	2
100%	ON	ON
70%	ON	OFF
50%	OFF	OFF

### DIPSWITCH SETTINGS

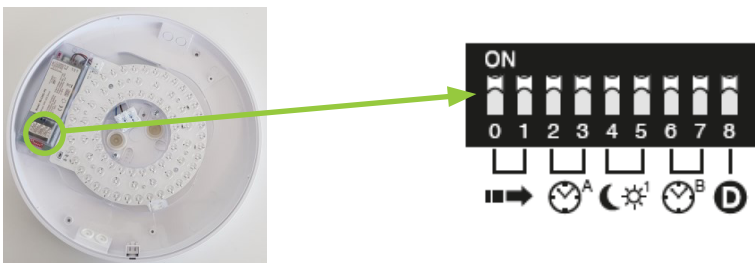

#### Microwave sensor detection range

The detection range/sensitivity of the sensor may be adjusted if required. Default setting is **100%**.

Sensor Range		
Dipswitch	0	1
100%	ON	ON
50%	ON	OFF
25%	OFF	ON
10%	OFF	OFF

# Chamaeleon Deco 2



Standard D2-CHAM

## Installation Instructions

### Daylight sensor

The daylight sensor may be used to switch the fitting off when there is sufficient natural light in the area. When the daylight level drops below the “ON” value, the fitting will turn on at the standby level and the microwave sensor becomes active. When the daylight level exceeds the “OFF” value, the light switches off.

The “disable” setting disables the daylight sensor.

Default setting is **disabled**.

Daylight Sensor			
ON	OFF	4	5
5lux	25lux	ON	ON
25lux	75lux	ON	OFF
50lux	75lux	OFF	ON
Disable	Disable	OFF	OFF


## LIGHT OPERATIONAL SETTINGS

### Hold Time

Hold time is the time the fitting remains at 100% brightness after motion is no longer detected.

Default setting is **1min**.

Hold Time		
Dipswitch	2	3
5s	ON	ON
1min	ON	OFF
5min	OFF	ON
10min	OFF	OFF

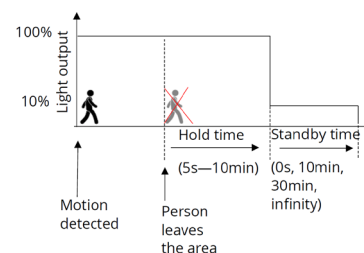

### Standby Time

Standby time is the period the fitting remains at the standby level before it switches off. If the standby level is set to infinity, the fitting always remains at standby level when the area is unoccupied.

Default setting is **infinity**.

Standby Time		
Dipswitch	6	7
0s	ON	ON
10min	ON	OFF
30min	OFF	ON
Infinity	OFF	OFF

### Standby Level

The standby level is the lower brightness level. When standby time is set to infinity, the standby level will be 10% and cannot be changed.

Default setting is **10%**.

Standby Level	
Dipswitch	8
10%	ON
25%	OFF

# Chamaeleon Deco 2

Standard D2-CHAM




## Installation Instructions

### APPLICATION EXAMPLES

The settings marked in **green** can be selected to achieve the functions mentioned below

#### Stairs and corridors

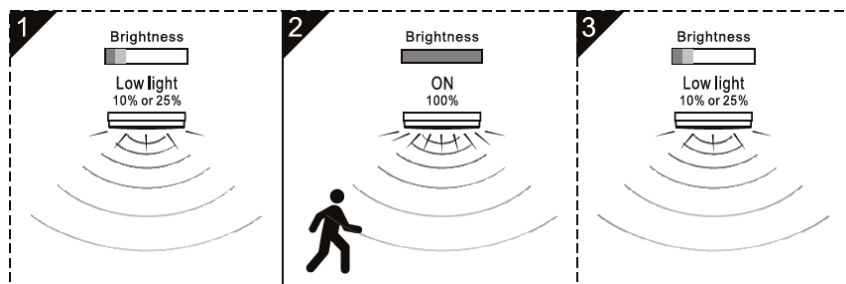


When motion is detected the fitting switches to full light.

When motion is no longer detected, after the **hold time**, the fitting returns to the standby level.

The light remains at the standby level until motion is detected again.

Sensor Range		Hold Time			Daylight Sensor				Standby Time			Standby Level	
Dipswitch	1	Dipswitch	2	3	ON	OFF	4	5	Dipswitch	6	7	Dipswitch	8
100%	ON	5s	ON	ON	5lux	25lux	ON	ON	0s	ON	ON	10%	ON
50%	OFF	1min	ON	OFF	25lux	75lux	ON	OFF	10min	ON	OFF	25%	OFF
		5min	OFF	ON	50lux	150lux	OFF	ON	30min	OFF	ON		
		10min	OFF	OFF	Disable	Disable	OFF	OFF	Infinity	OFF	OFF		

#### Store rooms and garbage rooms

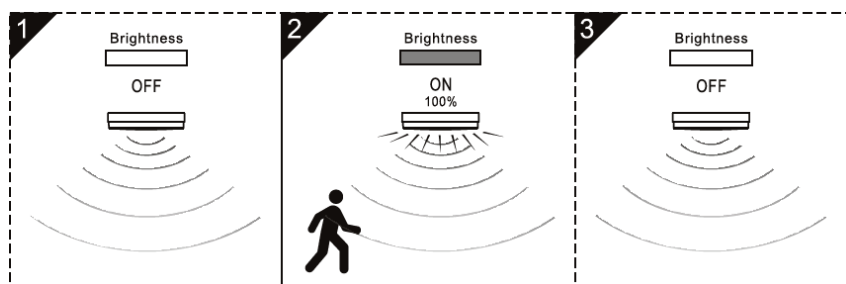

When motion is detected, the fitting switches to full light.

When motion is no longer detected, after the **hold time**, the fitting switches off.

Sensor Range		Hold Time			Daylight Sensor				Standby Time			Standby Level	
Dipswitch	1	Dipswitch	2	3	ON	OFF	4	5	Dipswitch	6	7	Dipswitch	8
100%	ON	5s	ON	ON	5lux	25lux	ON	ON	0s	ON	ON	10%	ON
50%	OFF	1min	ON	OFF	25lux	75lux	ON	OFF	10min	ON	OFF	25%	OFF
		5min	OFF	ON	50lux	150lux	OFF	ON	30min	OFF	ON		
		10min	OFF	OFF	Disable	Disable	OFF	OFF	Infinity	OFF	OFF		


# Chamaeleon Deco 2

Standard D2-CHAM



## Installation Instructions

### 3-step dimming to off

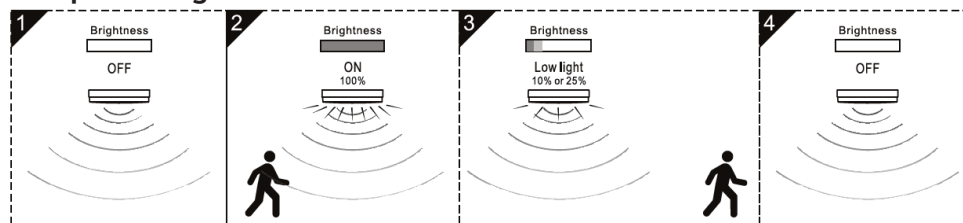


When motion is detected the fitting switches to full light.

After motion is no longer detected, after the **hold time**, the fitting dims to standby level.

Then, after the **standby time**, it will switch off.

Sensor Range		Hold Time			Daylight Sensor				Standby Time			Standby Level	
Dipswitch	1	Dipswitch	2	3	ON	OFF	4	5	Dipswitch	6	7	Dipswitch	8
100%	ON	5s	ON	ON	5lux	25lux	ON	ON	0s	ON	ON	10%	ON
50%	OFF	1min	ON	OFF	25lux	75lux	ON	OFF	10min	ON	OFF	25%	OFF
		5min	OFF	ON	50lux	150lux	OFF	ON	30min	OFF	ON		
		10min	OFF	OFF	Disable	Disable	OFF	OFF	Infinity	OFF	OFF		

### Using the Daylight Sensor

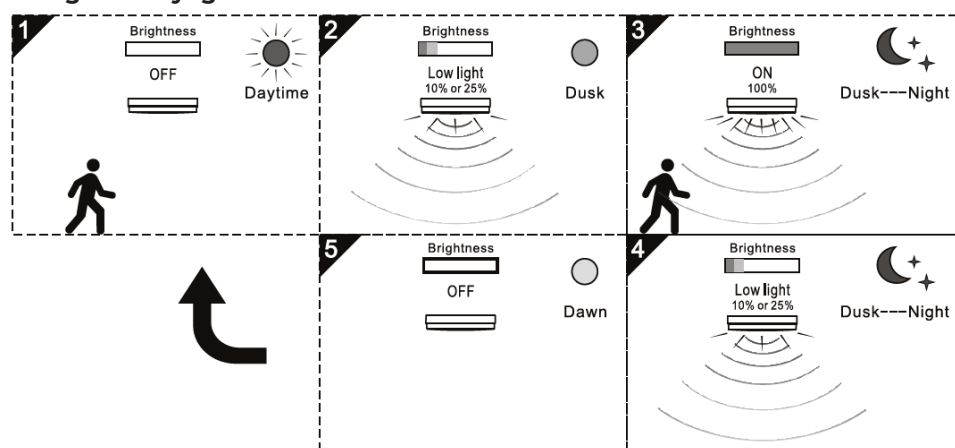

When there is sufficient natural light, the fitting remains off.

At dusk, the fitting switches to standby mode.

When motion is detected during the night, the fitting will switch to full light.

When motion is no longer detected, after the hold time, the fitting returns to standby mode.

Sensor Range		Hold Time			Daylight Sensor				Standby Time			Standby Level	
Dipswitch	1	Dipswitch	2	3	ON	OFF	4	5	Dipswitch	6	7	Dipswitch	8
100%	ON	5s	ON	ON	5lux	25lux	ON	ON	0s	ON	ON	10%	ON
50%	OFF	1min	ON	OFF	25lux	75lux	ON	OFF	10min	ON	OFF	25%	OFF
		5min	OFF	ON	50lux	150lux	OFF	ON	30min	OFF	ON		
		10min	OFF	OFF	Disable	Disable	OFF	OFF	Infinity	OFF	OFF		