

# DOWNLIGHT enl-DL524



The DL524 is an easy to install decorative LED downlight with a sleek design. Low glare & colour options make it suitable to be installed in corridors, reception areas or general office areas.

## FEATURES

- COB light source
- IP54 - Weather protection
- Supplied with 1.2m flex & plug

## OPTIONS

- Multiple Optics (beam angles)
- Colour Options - Black, White or Wood Grain
- Dali Controls



# DOWNLIGHT enl-DL524



## PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight(kg)
enl-DL524-15-8yy-zz-c	15	1400	Ø100 (A) x 134 (B)	0.8
enl-DL524-25-8yy-zz-c	25	2300	Ø120 (A) x 144 (B)	1
enl-DL524-35-8yy-zz-c	35	3200	Ø170 (A) x 159 (B)	1.6


yy stands for CCT. Use 27 for 2700K, 30 for 3000K, 40 for 4000K, 50 for 5000K.

zz stands for Beam Angle. Use 24, 36, 60.

c stands for Colour. Use W for White, B for Black, WD for Wood Grain.

DALI dimmable options available on request

## DIMENSIONS

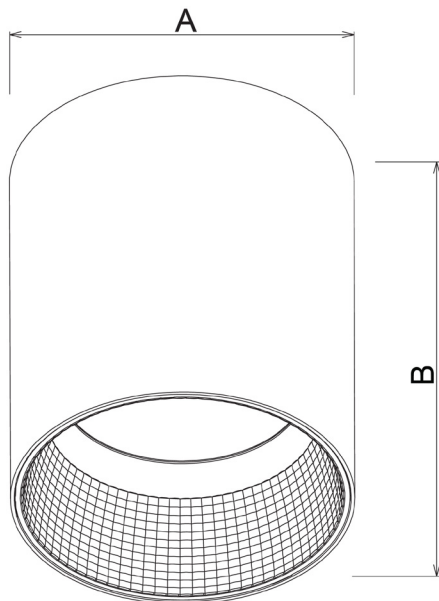

## COMPLIANCE

The enl-DL524 meets all relevant standards and regulatory requirements.



## TECHNICAL INFORMATION

### Optical

Light source	LED
CRI	Ra>80
Beam Angle	24°, 36°, 60°
CCT	2700K, 3000K, 4000K, 5000K

### Electrical

Power consumption	15W, 25W or 35W
Operating voltage & frequency	220-240 VAC , 50/60 Hz
Power factor	>0.90

### Environmental

IP rating	IP54
Ambient temperature range	-20°C to + 40°C
Material Composition (body)	Aluminium Die-casting
Fixture Colour	White (RAL 9016), Black (RAL9005), Wood Grain

**LED Lifespan** >54,000hrs @L70

**Warranty\*** 5 years

Data subject to change without notice  
\* Refer to warranty policy