

DOWNLIGHT enl-DL905



The DL905 is a low glare LED Downlight with a wide range of power options. It also has the alternative of being surface mounted. Designed for Offices, Receptions, Corridors, Staff Rooms and Toilets

FEATURES

- Efficacy up to 130lm/W
- IP54 - Ingress Protection
- Supplied with a 1.2m Flex and Plug

OPTIONS

- Surface Mount Kit available for certain fittings
- Black or White colour options available
- DALI-2 or Casambi control options available

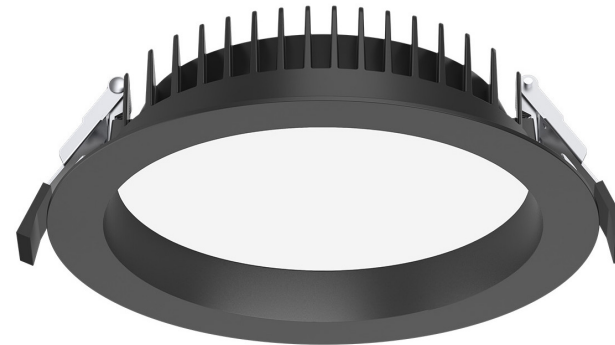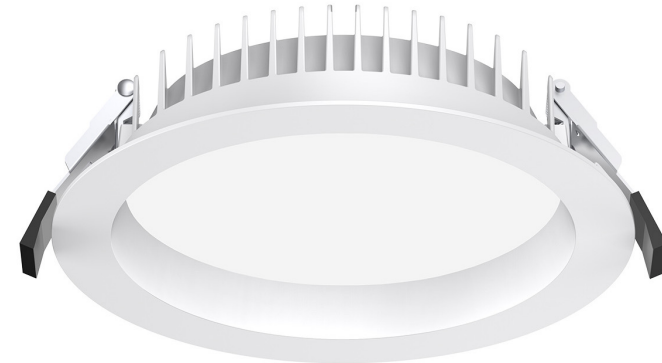


DOWNLIGHT enL-DL905

PRODUCT RANGE

| Model # | Rated Power (W) | Luminous Flux (lm) | Surface Mountable | Dimensions(mm) | | | Cutout (mm) | Weight (kg) |
|------------------------|-----------------|--------------------|-------------------|----------------|------|------|-------------|-------------|
| | | | | A | B | C | | |
| enL-DL905-7-8yy-c-85 | 7 | 700 | N/A | Ø85 | Ø68 | 49 | Ø65-75 | 0.2 |
| enL-DL905-10-8yy-c-110 | 10 | 1080 | N/A | Ø110 | Ø86 | 52 | Ø90-95 | 0.3 |
| enL-DL905-12-8yy-c-145 | 12 | 1420 | Yes | Ø145 | Ø115 | 53 | Ø120-130 | 0.5 |
| enL-DL905-18-8yy-c-145 | 18 | 2010 | | | | | | |
| enL-DL905-18-8yy-c-170 | | 18 | 2350 | N/A | Ø170 | Ø136 | 53 | Ø140-150 |
| enL-DL905-25-8yy-c-170 | 25 | | 3100 | | | | | |
| enL-DL905-18-8yy-c-190 | 18 | 2350 | Yes | Ø190 | Ø155 | 53 | Ø160-170 | 0.7 |
| enL-DL905-25-8yy-c-190 | 25 | 3100 | | | | | | |
| enL-DL905-18-8yy-c-228 | 18 | 2350 | Yes | Ø228 | Ø194 | 53 | Ø200-210 | 1 |
| enL-DL905-25-8yy-c-228 | 25 | 3300 | | | | | | |
| enL-DL905-35-8yy-c-228 | 35 | 4680 | | | | | | |

yy stands for CCT. Use 27 for 2700K, 30 for 3000K, 40 for 4000K or 50 for 5000K.
c stands for Fixture Colour. Use B for Black or W for White

DIMENSIONS

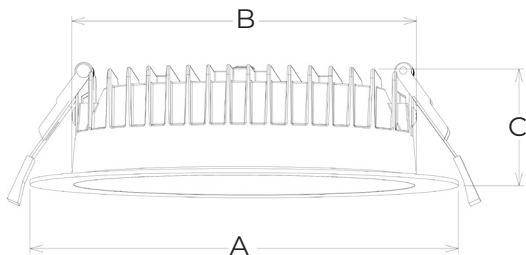

COMPLIANCE

The enL-DL905 meets all relevant standards and regulatory requirements.



TECHNICAL INFORMATION

Optical

| | |
|--------------------|---------------------|
| Light source | LED |
| CRI | Ra>80 |
| Beam Angle | 90° |
| CCT | 3000K, 4000K, 5000K |
| Luminaire efficacy | Up to 130lm/W |

Electrical

| | |
|-------------------------------|------------------------|
| Power consumption | 7W - 35W |
| Operating voltage & frequency | 220-240 VAC , 50/60 Hz |
| Power factor | >0.9 |

Environmental

| | |
|-----------------------------|---|
| IP rating | IP54(Below Ceiling), IP40(Inside Ceiling) |
| Ambient temperature range | -20°C to + 45°C |
| Material Composition (body) | Aluminium Die-casting |
| Fixture Colour | White (RAL9016) or Black (RAL9005) |

Expected Lifespan >54,000hrs @L70

Controls - Optional DALI-2 / Casambi

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

DOWNLIGHT enI-DL905




ACCESSORIES

Available for 145, 190 or 228 sized models, Please order separately

| Model # | Dimensions(mm) | | | Weight (kg) |
|--------------------|----------------|-----|------|-------------|
| | A | B | C | |
| enI-DL905-SM-c-145 | Ø145 | 93 | Ø148 | 0.4 |
| enI-DL905-SM-c-190 | Ø190 | | Ø193 | 0.5 |
| enI-DL905-SM-c-228 | Ø228 | 100 | Ø232 | 0.6 |

c stands for Fixture Colour. Use B for Black or W for White



COMPLIANCE

The enI-DL905 meets all relevant standards and regulatory requirements.

