


## Installation Instructions




**NOTE: All electrical work must be carried out by a licensed electrician as per the latest AS 3000 wiring regulations. Do not disassemble the panel as this will void the warranty.**

The LED driver must be connected to the LED panel before the LED driver is connected to mains power.  
Indoor use only

### Item List

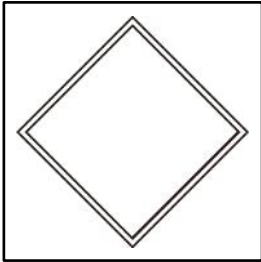

LED Panel

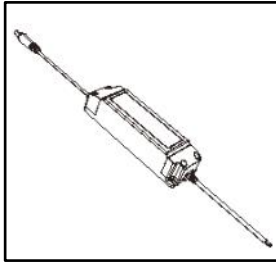

LED Power Supply / Driver


### Panel Sizes

Size	L x W x H (mm)
600 x 300	595 x 295 x 10
600 x 600	595 x 595 x 10
1200 x 300	1195 x 295 x 10
1200 x 600	1195 x 595 x 10

### Wiring


#### Standard Driver

1. Connect LED driver to the LED panel by joining the connectors
2. Plug the power plug into a mains power socket

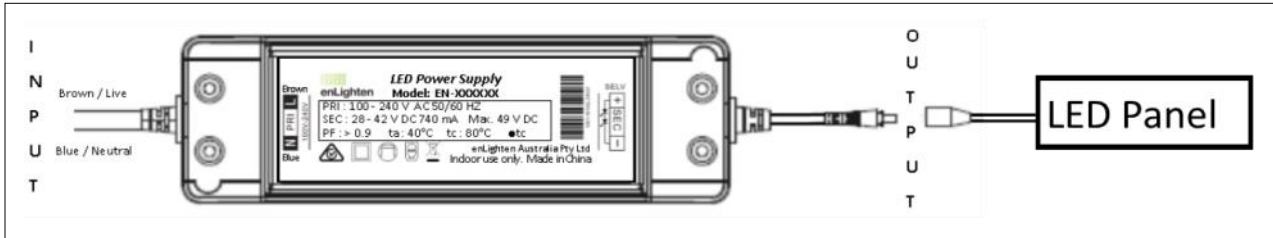

#### Dimmable Driver

1. Connect LED driver to the LED panel by joining the connectors
2. Connect INPUT POSITIVE (+) control signal wire to DIM+ (green wire) and INPUT NEGATIVE (-) control signal wire to DIM- (white wire) on the output side of the driver
3. Plug the power plug into a mains power socket

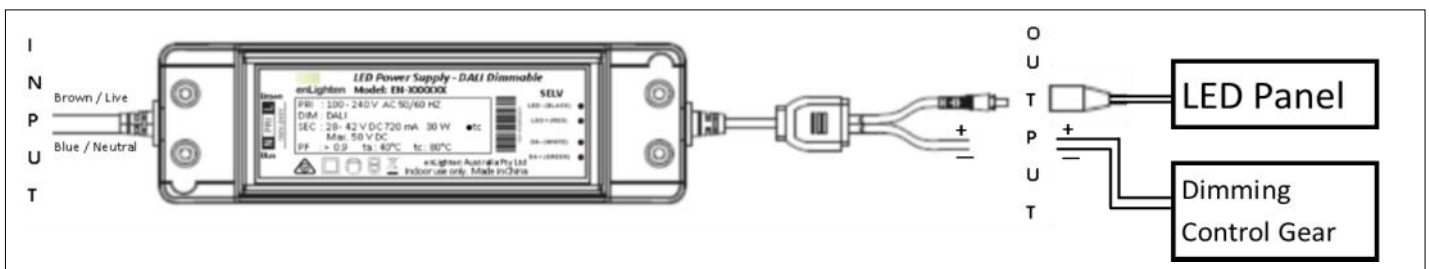


**NOTE: Installer must ensure that the building / lighting control system is compatible with the LED power supply / driver before installation.**

## Installation


### Recessed



1. Remove ceiling tile

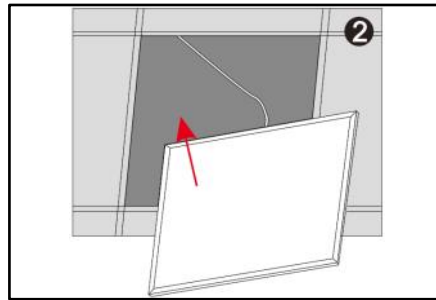

2. Recess LED panel into ceiling

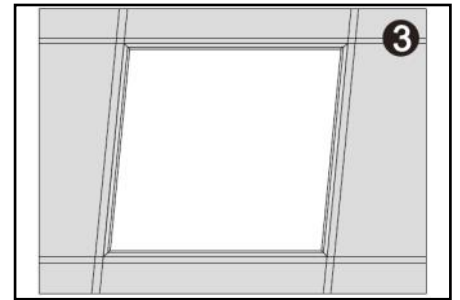


3. Ensure panel sits flush with the ceiling


### Suspended



Stainless Steel Hanging Kit (Part No. HG-001)

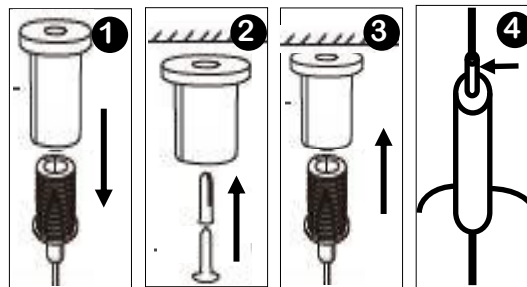


1. Unscrew the ceiling mount from the cable
2. Fix the ceiling mount to the ceiling
3. Screw the cable into the ceiling mount
4. To adjust mounting height, press the toggle release and pull wire through

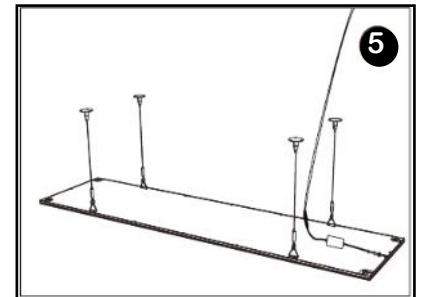


5. Attach hooks to suspension points on panel as shown above


### Surface Mounted

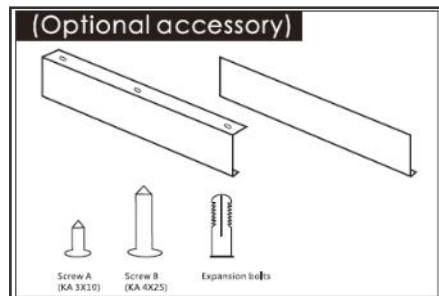


Surface Mount Kit  
(Part Nos. SM-001, SM-002, SM-003)

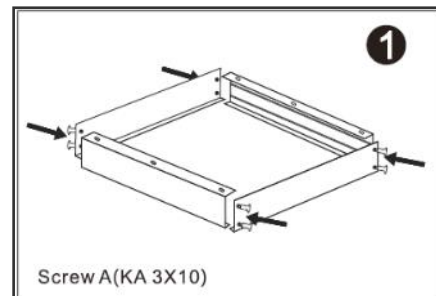


1. Assemble the four sides with **Screw A** to form a rectangular frame

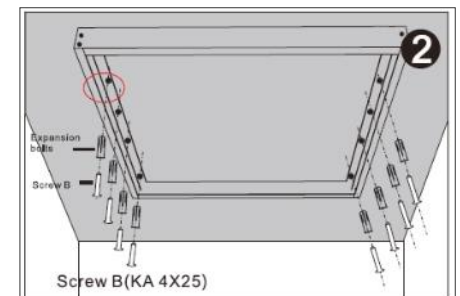


2. Mount the rectangular frame to the ceiling

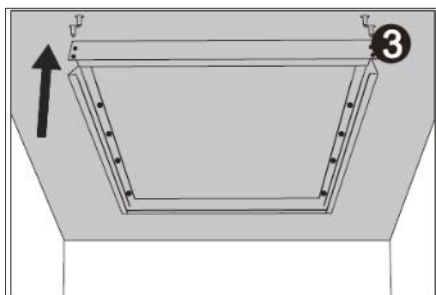

3. Detach one side from the frame

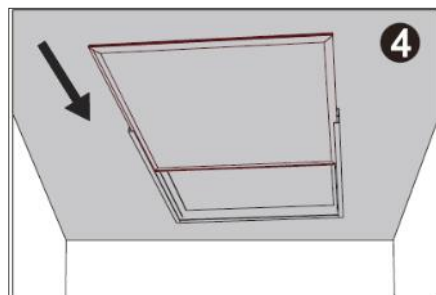

4. Insert the LED panel into the frame

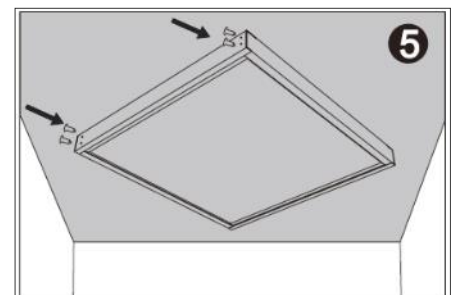

5. Re-attach the side to the frame with **Screw A**

**!** NOTE: The light must be operated within its specified operating parameters and in accordance with our warranty requirements. These documents are available on our website.