



enLighten

Commercial/Office Luminaire

NEW

Backlit design with significantly improved efficacy

Skyline

Superior construction, high performing, low glare LED panel

Designed for spaces where visual comfort and energy performance are equally important, the Skyline is a low-glare backlit LED panel ideal for offices and learning environments. Its precision microprismatic diffuser produces uniform illumination while helping to control glare and create a more comfortable space for occupants.

With efficacy of up to 170 lm/W, the Skyline delivers high-performance lighting with reduced energy demand. The seamless, screwless frame creates a refined, flat profile that complements both recessed and surface-mounted ceiling applications. Optional DALI-2, Casambi and tunable white configurations provide flexible control.



OPTIONS AND BENEFITS

- **Easy installation** with 1.5m flex & plug
- **Low glare, UGR<19** design to maximise comfort
- **Flicker free driver** performance to reduce eye strain
- **High luminaire efficacy** of up to 170lm/W
- **IP54** - front side for extra protection
- **Seamless frame** for enhanced appearance & rigidity
- **Suitable for standard ceiling grid sizes**
- **Mounting options available** - Recessed & surface mounted kits
- **Air Return frames available**
- **Control Options** - DALI-2 and Casambi
- **Tunable white option**
- **Lower power** - 15W for single tube fluoro replacements
- **5 year warranty**

APPLICATIONS



CLASSROOMS



DAYCARE



GOVERNMENT
BUILDINGS



LARGE
RETAIL



LECTURE
HALLS



LIBRARIES



MEETING
ROOMS



OFFICE
AREAS

FEATURES



CEILING
RECESSED



FLICKER
FREE



LOW
GLARE



SAFETY
COMPLIANCE



SURFACE
MOUNT



TUNABLE
WHITE



5
YEAR
WARRANTY

SKYLINE PRODUCT RANGE

Model #	CRI	Rated Power (W)	Lumens (lm)	Size (mm)	Weight (kg)
SKY2-6030-15-8yy	80	15	2200	595 x 295	1.0
SKY2-6060-15-8yy			2470	595 x 595	1.9
SKY2-1230-15-8yy				1195 x 295	2.0
SKY2-6060-19-8yy	19	19	3170	595 x 595	1.9
SKY2-1230-19-8yy				1195 x 295	2.0


yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K

For model numbers for DALI-2, Casambi and Koolmesh lighting options, contact enLighten


For information on Tunable White, refer to Tunable White brochure

FITTING DIMENSIONS


SKY2-1230-8yy

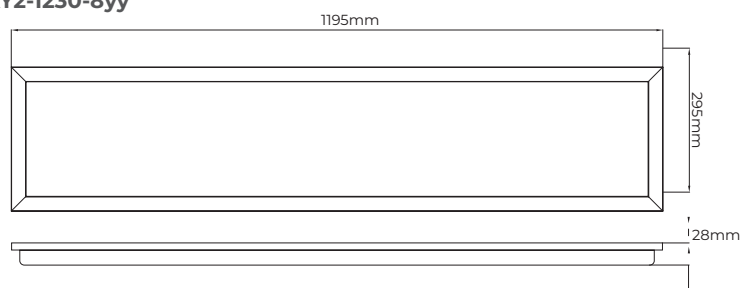

SKY2-6060-8yy

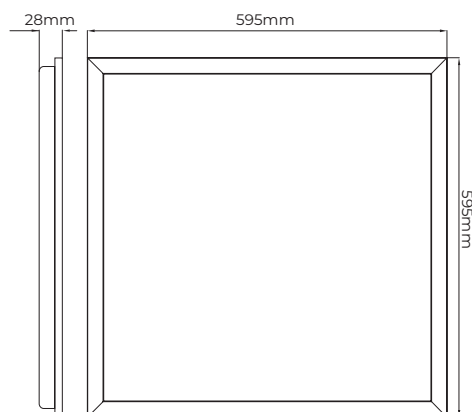

SKY2-6030-8yy

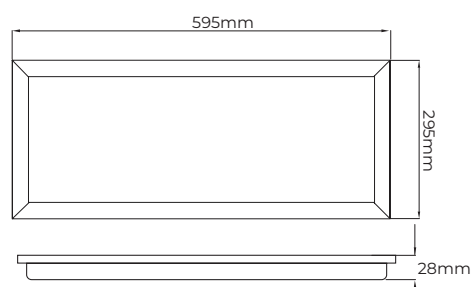

TECHNICAL INFORMATION

Optical

Lumen output	2200 - 3170 lumens
CRI	Ra>80 (standard), Ra>90 (optional)
CCT	4000K standard with 3000K, 5000K optional
Luminaire efficacy	Up to 170lm/W
Glare rating (UGR)	UGR < 19

Electrical

Power consumption	15W, 19W
Operating frequency	50Hz
Operating voltage range	220 – 240V AC
Power factor	>0.95 / 240V AC

Environmental

IP rating	IP54(front)/IP40(back)
Ambient temperature range	-20°C to 40°C
Material Composition (body)	White powder-coated aluminium
Expected Lifespan	>120,000 hours @ 70% lumen maintenance

Controls - Optional


Dimming	DALI-2, Casambi, Koolmesh
---------	------------------------------

Warranty*


5 years

Data subject to change without notice
* Refer to warranty policy


PHOTOMETRICS



Model: SKY2-1230-8yy



Model: SKY2-6060-8yy

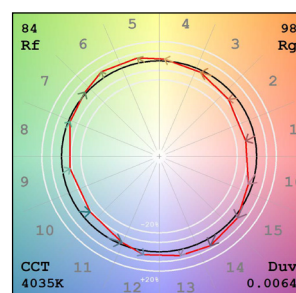


TM-30 Spectrum

RECESSED FRAMES CODES


Model Code	Fits Skyline Model	Cut-Out Size (mm)	Dimensions (mm)
R-001	SKY2-1230	1210 x 310	1230 x 330 x 40
R-002	SKY2-6060	610 x 610	630 x 630 x 40
R-003	SKY2-6030	610 x 310	630 x 330 x 40

RECESSED FRAME DIMENSIONS


R-001

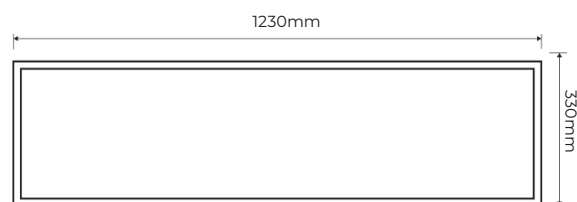

R-002



R-003




SURFACE MOUNT FRAMES CODES


Model Code	Fits Skyline Model	Dimensions (mm)
SM2-001	SKY2-1230	300 x 1200 x 63
SM2-002	SKY2-6060	600 x 600 x 63
SM2-003	SKY2-6030	300 x 600 x 63

SURFACE MOUNT FRAME DIMENSIONS


SM2-001

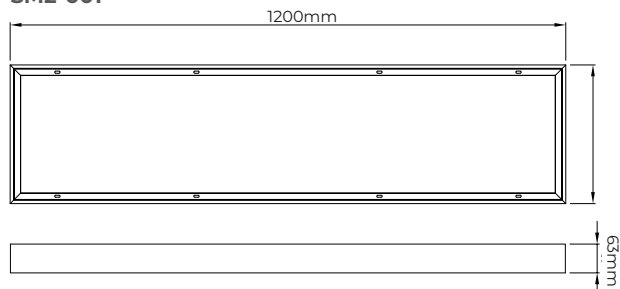

SM2-002

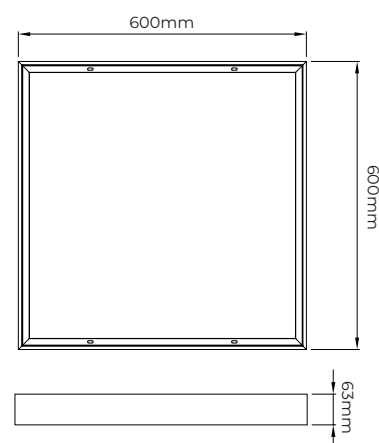

SM2-003




AIR RETURN FRAMES CODES


Model Code	Fits Skyline Model	Dimensions (mm)
ARF-001	SKY2-1230	1200 x 450 x 40
ARF-002		1275 x 400 x 40
ARF-003		1350 x 450 x 40
ARF-004		1275 x 450 x 40
ARF-006	SKY2-6030	595 x 395 x 40

AIR RETURN FRAME DIMENSIONS


ARF-001

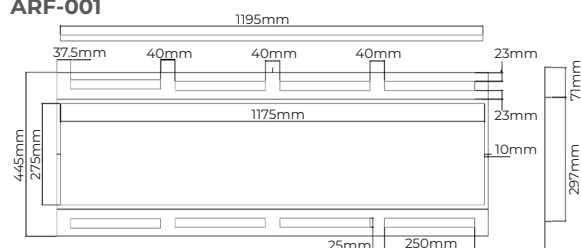


ARF-002

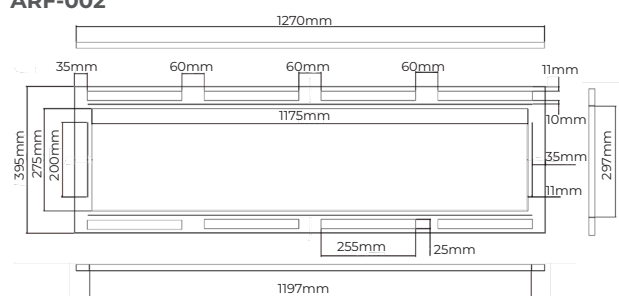


ARF-003

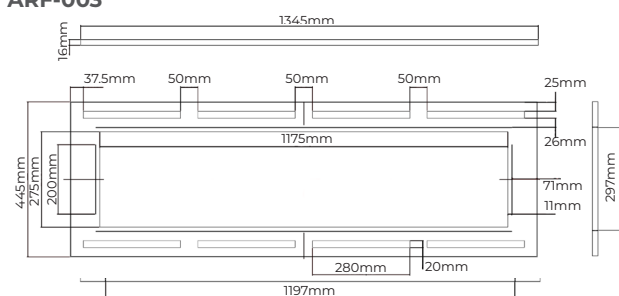

ARF-004

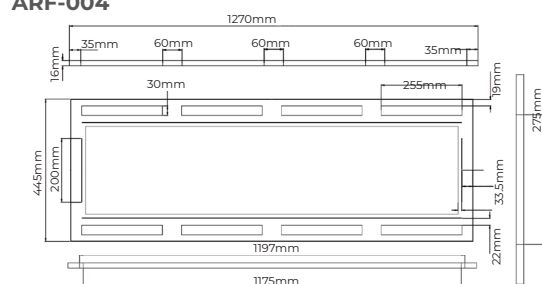

ARF-006

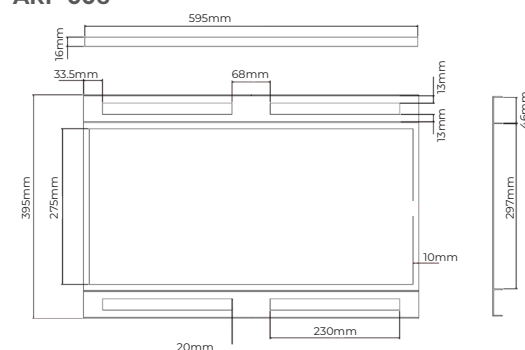

COMPLIANCE

The Skyline LED panel meets or exceeds all relevant standards and regulatory requirements.

For a full compliance and testing list visit www.enlighten.com.au.
IES files, warranty, installation and product guides are also available for download.

Sold nationally through major electrical wholesalers.

