



WHERE RELIABILITY IS CRITICAL



Tauro Black HT

High temperature rated, robust high bay light with programmable driver

Designed for illuminating large interior spaces where reliability is critical.

Low maintenance high bay that operates well in high temperature environments.

A range of optics make this light suitable for both open spaces and pallet racking requirements. These optics will ensure good uniformity and vertical illumination creating a safe work environment.



APPLICATIONS



WAREHOUSING



WORKSHOP



MANUFACTURING



LARGE
RETAIL



LOADING
DOCKS

OPTIONS AND BENEFITS

- **10 year warranty**
- **Controls-ready programmable LED driver** with ultra-long lifetime
- **High temperature rating** - designed to operate in 60°C
- **Industry leading efficacy** of up to 165 lm/w using Nichia LEDs
- **Up to 40% more efficient** when compared to standard LED highbays.
- **Variety of optics available** - symmetric & asymmetric
- **Wide range of sizes** 90W-240W to cover low to high ceilings
- **Optional controls** through the high temperature rated daylight harvesting & motion sensor controller
- **Durable and robust** with IP65 & IK10
- **Hanging kits included** for easy mounting

FEATURES



SAFETY
COMPLIANCE



MICROWAVE
MOTION SENSOR



DAYLIGHT
SENSOR



SURFACE
MOUNT



SUSPENSION
MOUNT



INGRESS
PROTECTION



IMPACT
RATING



10 kV SURGE
PROTECTION



YEAR
WARRANTY

PRODUCT RANGE

The Tauro Black HT LED high bay is available in 90W to 240W with a variety of aisle racking and symmetric optics.

Control options include daylight harvesting and microwave motion sensor.

Model #	Optic Code	Lument output (lm)	Rated Power (W)	Size LxWxH (mm)	Weight (kg)
TB90HT	57 AR1 57 AR2 57 AR3 57 S1 57 S2	14,100	90	718 x 137 x 102	4.7
TB120HT		18,700	120	948 x 137 x 102	5.7
TB150HT		23,000	150	1178 x 137 x 102	6.9
TB180HT		27,700	180	718 x 275 x 102	8.5
TB240HT		37,100	240	950 x 299 x 102	10.3

*Model number may vary depending on the control options. Contact enLighten for the complete model number before ordering. Data may vary slightly with different optics. Refer to latest IES files/test reports to get exact figures for lumen outputs & wattages.

TECHNICAL INFORMATION

Optical

Light source	Nichia LEDs
Lumen output	14,100 - 38,550 lumens
CRI	Ra>70 standard; Ra>80 optional
CCT	5000K standard, 4000K optional
Luminaire efficacy	151-165 lm/W
Beam angle	Symmetrical & asymmetrical

Electrical

Power consumption	90W - 240W
Operating frequency	50 Hz
Operating voltage range	90 - 305V AC
Power factor	>0.9 /240V AC
Driver	Inventronics EUD-DVL
Surge Protection	6kV line-line, 10kV line-earth (driver) 1kV (sensor)

Environmental

IP rating	IP65
Impact rating	IK10
Net weight	4.7kg, 5.7kg, 6.9kg, 8.5kg & 10.3kg (+/- 0.3kg)
Ambient temperature range	-30°C to +60°C
Material composition (body)	Aluminium alloy
Material composition (diffuser)	Polycarbonate lens
Expected lifespan	>130,000 hours @L70

Controls – Optional

Integrated microwave motion and daylight harvesting sensor with remote control (for commissioning)


Inclusions

Single point mounting bracket & 2m adjustable stainless steel wire
Surface mount brackets (optional)

Warranty*

Data subject to change without notice
* Refer to warranty policy

PHOTOMETRICS

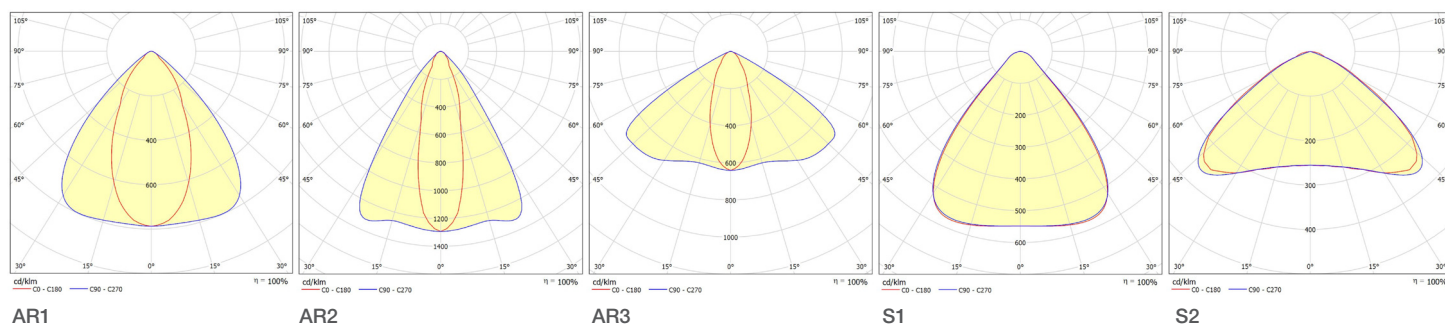

AR: Asymmetrical Rack Distribution, S: Symmetric Distribution

SMART CONTROL SENSOR


The Tauro Black HT high bay has a smart control sensor for daylight harvesting and motion detection. The high bay sensor is an LED lighting control device that can detect motion and ambient light when mounted up to a maximum height of 12m. Gain up to 40% increase in energy savings using sensors.

Design features:

- Wide detection range of up to 16m diameter
- 2 & 3 Step dimming offers full, standby & off modes
- Daylight harvesting function can adjust light output depending on the amount of natural light available
- Maximum mounting height of 12m suitable for warehouse use
- Settings are adjustable via a remote control commissioning tool (**part no. HB-IRC**)

Operating modes of the high bay sensor:

- Motion detection and daylight harvesting
- Motion detection only (no daylight harvesting)
- Daylight harvesting only (no motion detection)

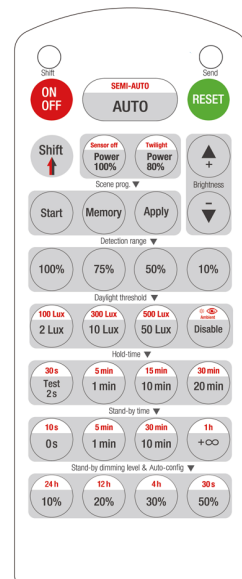

The smart control sensor can achieve up to 3-step dimming functions between high light output (100%), stand-by dimming (10-50%) and off. An integrated photo electric (PE) cell detects ambient light levels and will adjust the light output according to preset lux thresholds.

The intelligent lux level auto-commissioning function calibrates the target lux level automatically which simplifies the commissioning process.

OUR MOUNTING


Single point mounting bracket

The Tauro Black HT high bay comes with a single point mounting bracket, adjustable stainless steel suspension cables with hook and an integrated level assistant for easy installation.

ACCESSORIES

The surface mount bracket is an optional accessory making it possible to easily mount directly onto the ceiling.

Part #	Wattage
TB-Bracket-S	90W-150W
TB-Bracket-L	180W-240W

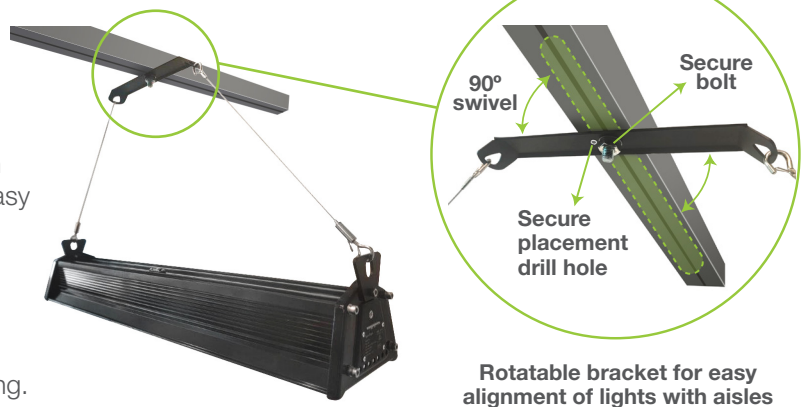

COMPLIANCE

The Tauro Black HT meets or exceeds all relevant standards and regulatory requirements.

For a full compliance and testing list visit www.enlighten.com.au.

IES files, warranty, installation and product guides are also available for download.

Sold nationally through major electrical wholesalers.



Tauro Black HT

High temperature LED warehouse high bay

NEW



Wide range of sizes
90W-240W for low and
high ceilings

www.enlighten.com.au | 1800 365 444



enLighten Australia Pty Ltd
8/78 Reserve Road, Artarmon NSW 2064