

CLEANROOM PANEL enI-CP650



The CP650 is an IP54 rated panel suitable for cleanrooms. Mounted directly onto ceilings with a seal, this panel operates in areas where maintaining a positive or negative pressure is important.

FEATURES

- Supplied with 1.2m flex & plug
- Low Glare - less than UGR 19
- Designed to prevent build up of dust

OPTIONS

- Sizing options - 637mm or 1237mm
- Colour rendering options available



CLEANROOM PANEL enl-CP650




PRODUCT RANGE


Model #	Rated Power (W)	CRI	Luminous Flux (lm)	Dimensions(mm)	Weight (kg)
enl-CP650-30-8yy-637	30	80	3600	637 x 637 x 12.5	3.1
enl-CP650-30-8yy-1237				337 x 1237 x 12.5	3.4
enl-CP650-36-8yy-637	36		4300	637 x 637 x 12.5	3.1
enl-CP650-36-8yy-1237				337 x 1237 x 12.5	3.4
enl-CP650-30-9yy-637	30	90	2950	637 x 637 x 12.5	3.1
enl-CP650-30-9yy-1237				337 x 1237 x 12.5	3.4
enl-CP650-36-9yy-637	36		3550	637 x 637 x 12.5	3.1
enl-CP650-36-9yy-1237				337 x 1237 x 12.5	3.4

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K
For DALI-2 Dimmable fittings, Please use -DALI at the end of Model #

DIMENSIONS

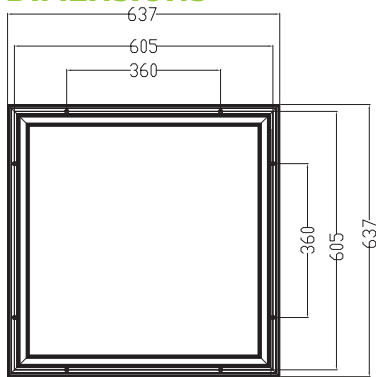

enl-CP650-30-xyy-637

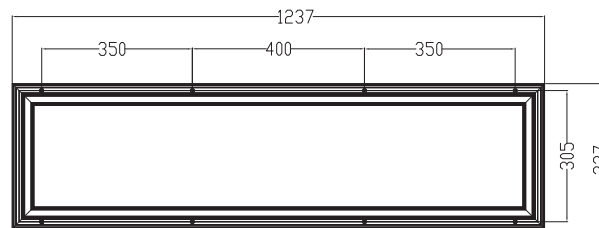

enl-CP650-30-xyy-1237

TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80, Ra>90
CCT	3000K, 4000K, 5000K
Beam Angle	90°
Lumen Efficacy	Up to 120lm/W

Electrical

Power consumption	30W or 36W
Operating voltage & frequency	220-240 VAC, 50/60Hz
Power factor	>0.9

Environmental

IP rating	IP54
Ambient temperature range	1°C to + 40°C
Material Composition (body)	Aluminum
Fixture Colour	White (RAL9016)

Expected Lifespan >54,000hrs @L70

Controls - Optional DALI-2

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

COMPLIANCE

The enl-CP650 meets all relevant standards and regulatory requirements.

