

URBAN LIGHT enl-UB620



The UB620 is a LED Urban Light that connects to a suspended wire. It has a high lumen efficacy and a range of power options. Suitable for outdoor streetscope applications where a requirement to relocate light may be required or where poles would be intrusive.

FEATURES

- Efficacy up to 160lm/W
- IP66 - Weather protection
- IK10 - Impact resistance

OPTIONS

- Multiple Power Options
- Colour Options - Grey or Black



URBAN LIGHT enL-UB620




PRODUCT RANGE


Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight(kg)
enl-HB620-30-7yy-c	30	5100	480 x 480 x 264	6.9
enl-HB620-50-7yy-c	50	8500		
enl-HB620-80-7yy-c	80	13200		
enl-HB620-100-7yy-c	100	16000		

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K.
c stands for Fixture Colour. Use G for Grey or B for Black

DIMENSIONS

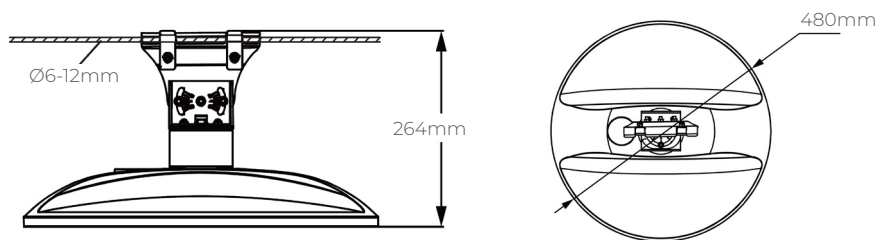

PHOTOMETRICS



COMPLIANCE

The enL-UB620 meets all relevant standards and regulatory requirements.



TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>70
Beam Angle	120°
CCT	3000K, 4000K, 5000K
Luminaire efficacy	Up to 160lm/W

Electrical

Power consumption	30W - 100W
Operating voltage & frequency	100-240 VAC , 50/60 Hz
Power factor	>0.95

Environmental

IP rating	IP66
IK rating	IK10
Ambient temperature range	- 40°C to + 50°C
Material Composition (body)	Aluminium Die-casting
Fixture Colour	Grey (RAL9007) / Black (RAL9005)

LED Lifespan >100,000hrs @L70

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

