

RECESSED AIR enI-CP573



The CP573 LED Panel has integrated return air slots. Ideal for commercial office retrofit projects where a low glare replacement for existing lighting with integrated R/A is required.

FEATURES

- Air slots to incorporate with air return design
- Low glare - UGR <19
- Supplied with 1.2m flex & plug

OPTIONS

- Louvred or Prismatic diffusers available
- Customisable slots available



RECESSED AIR enI-CP573



PRODUCT RANGE

Model #	CRI	Rated Power (W)	Luminous Flux (lm)	Dimensions(mm)	Weight (kg)
enI-CP573-10-6030-PR-8yy	80	10	1300	292 x 592 x 48	2.1
enI-CP573-16-6060-PR-8yy				592 x 592 x 48	4.3
enI-CP573-16-1230-PR-8yy				292 x 1192 x 48	3.3
enI-CP573-16-1240-PR-8yy		20	3325	392 x 1192 x 48	4.3
enI-CP573-20-6060-PR-8yy				592 x 592 x 48	4.3
enI-CP573-20-1230-PR-8yy				292 x 1192 x 48	3.3
enI-CP573-20-1240-PR-8yy	90	10	1370	392 x 1192 x 48	4.3
enI-CP573-10-6030-LV-9yy				292 x 592 x 48	2.1
enI-CP573-20-6030-LV-9yy				592 x 592 x 48	4.3
enI-CP573-20-1230-LV-9yy		20	3000	292 x 1192 x 48	3.3
enI-CP573-20-1240-LV-9yy				392 x 1192 x 48	4.3

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K
 Add -D for DALI-2 Driver and -C for Casambi Driver (please note lumen output will reduce by 12% for DALI and Casambi Options)

TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80, Ra>90
Fixture Diffuser	Louvred or Prismatic
CCT	3000K, 4000K, 5000K
Lumen Efficacy	Up to 160lm/W

Electrical

Power consumption	10W, 16W or 20W
Operating voltage & frequency	220-240 VAC , 50 Hz
Power factor	>0.9

Environmental

IP rating	IP20
Ambient temperature range	-10°C to + 40°C
Material Composition (body)	Steel
Fixture Colour	White (RAL9003)

Expected Lifespan >54,000hrs @L70

Controls - Optional

Dimming	DALI- 2, Casambi Wireless Control
---------	--------------------------------------

Warranty* 5 years

Data subject to change without notice
 * Refer to warranty policy

COMPLIANCE

The enI-CP573 meets all relevant standards and regulatory requirements.



www.enlighten.com.au | 1800 365 444




Ver 3

enLighten Australia Pty Ltd
 3/12 Frederick St, St Leonards, NSW 2065

RECESSED AIR enl-CP573

DIMENSIONS

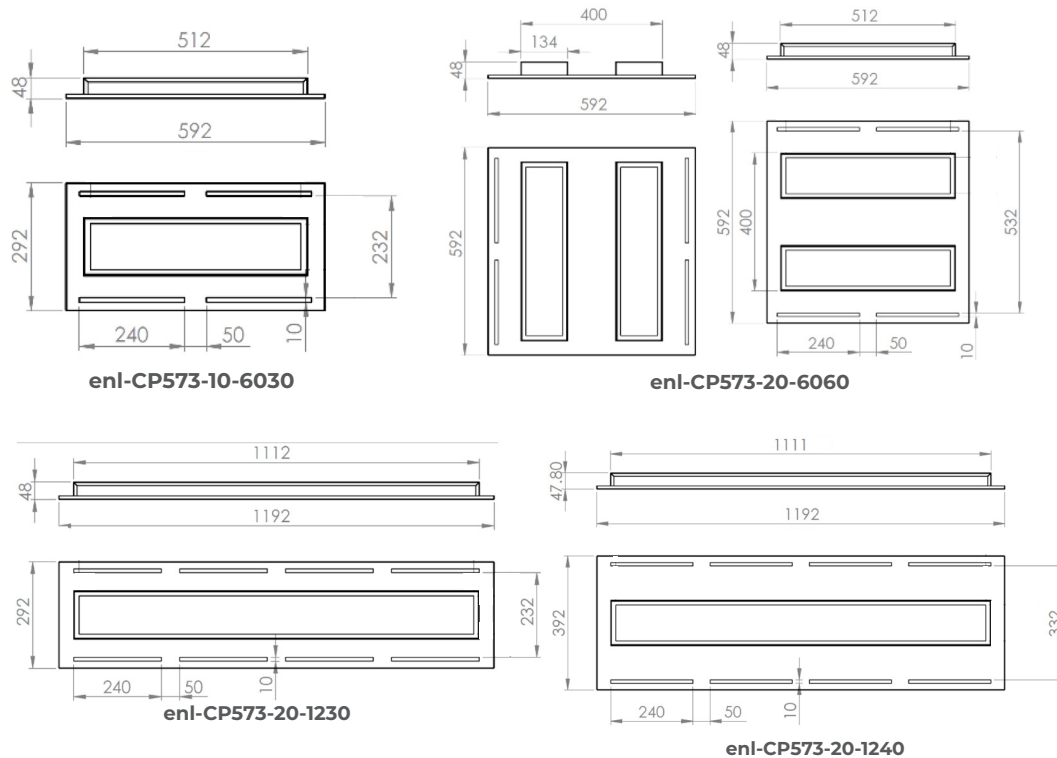

The Airlot dimensions can be customised to your requirements

COMPLIANCE

The enl-CP573 meets all relevant standards and regulatory requirements.

