

UP TO
70%
ENERGY SAVINGS

T8 / T5 fluorescent troffer replacement

Skyline

Superior construction, high performing, low glare LED panel

NEW

Improved Efficacy
Reduced Power Consumption



PRODUCT RANGE

Model #	Description	Lumens (lm)	Rated Power (W)	Size (mm)	Weight (kg)
SKY26-1230	26W 4000K Skyline LED Panel	3250	26	1195 x 295	3.7
SKY26-6060	26W 4000K Skyline LED Panel	3250	26	595 x 595	3.5
SKY20-6030	20W 4000K Skyline LED Panel	2000	20	595 x 295	1.9

The Skyline is a low glare, edge lit LED panel that provides an energy efficient retrofit solution to conventional fluorescent luminaires.

The Skyline offers superior performance with the LED panels incorporating a unique light guide plate design, using a high quality PMMA. The micro-prismatic diffuser distributes the light evenly and eliminates glare.

This slimline LED panel is professionally finished with a seamless frame and is suitable for the office or school environment. Suitable for recessed, surface mounted or suspended applications.

CONTRACTOR BENEFITS

- **Easy to install** with 1.5m flex & plug
- **Mounting options available** - Recessed, hanging and surface mounted kits
- **Suitable for standard ceiling grid sizes**
- **Optional DALI/DSI** or 1-10V drivers for dimming

CLIENT BENEFITS

- **Low glare, UGR<19 and flicker free** to maximise comfort
- **Extra long lifespan** with >120,000 hours operation at L70
- **Panel designed for appearance and rigidity**
- **Heat expansion joints** to prevent warping
- **High luminaire efficacy** of up to 125 lm/W
- **Seamless frame** for enhanced appearance
- **5 year warranty**



(1230 & 6060 standard models only)


APPLICATIONS



FEATURES



DIMENSIONS

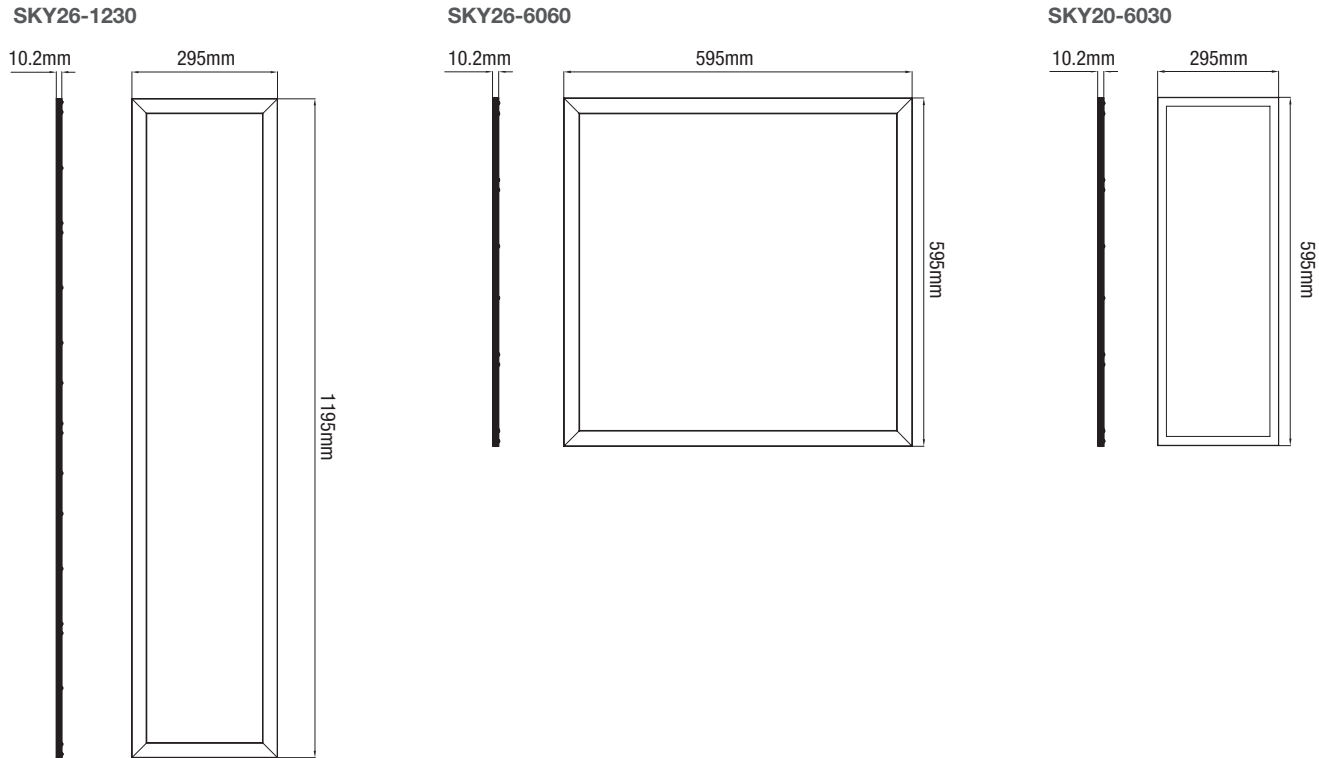

MOUNTING OPTIONS

Mounting option	Order code
Surface mount kit	SM-001 (1216 x 316 x 51 mm), SM-002 (616 x 616 x 51 mm), SM-003 (616 x 316 x 51 mm)
Recessed plaster kit	R-001 (1232 x 332 x 31 mm), R-002 (632 x 632 x 31 mm), R-003 (632 x 332 x 31 mm)
Stainless steel hanging kit	HG-001 (1.2m + 0.35m)

TECHNICAL INFORMATION

Optical

Lumen output	2000 - 3250 lumens
CRI	Ra > 80
CCT	4000K standard with 3000K, 5000K & 6000K optional
Luminaire efficacy	Up to 125 lm/W
Glare rating (UGR)	UGR < 19

Electrical

Power consumption (W)	20W - 26W
Operating frequency	50Hz
Operating voltage range	220 - 240V AC
Power factor	>0.95 / 240 V AC

Environmental

IP rating	IP40
Weight	1.9 - 3.7 kg
Ambient temperature range	-20°C to 40°C
Material Composition (body)	White powder-coated aluminium
Material Composition (diffuser)	PMMA LGP
Expected Lifespan	>120,000 hours @ 70% lumen maintenance


Controls - Optional

Dimming	DALI/DSI, 1 - 10V
---------	-------------------


Warranty*	5 years
-----------	---------

Data subject to change without notice
* Refer to warranty policy


PHOTOMETRICS

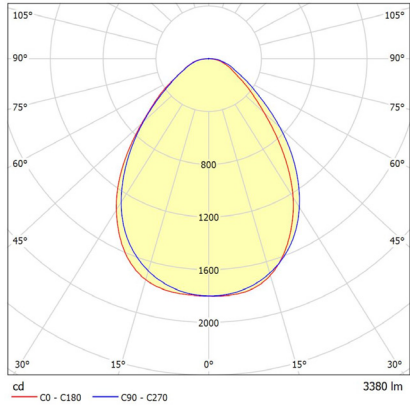

Model: SKY26-1230

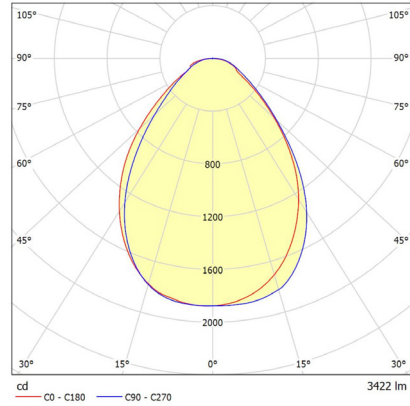

Model: SKY26-6060

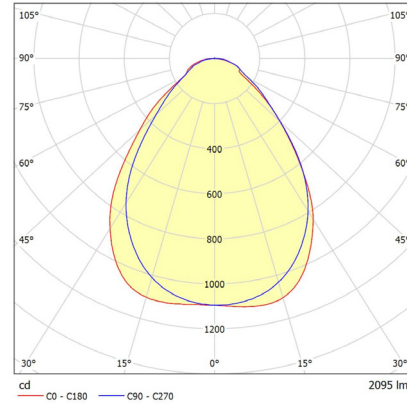

Model: SKY20-6030

COMPLIANCE

The Skyline LED panel meets or exceeds all relevant standards and regulatory requirements.

For a full compliance and testing list visit www.enlighten.com.au. IES files, warranty, installation and product guides are also available for download.



Sold nationally through major electrical wholesalers.