

# CLEANROOM PANEL enl-CP384




The CP384 is an IP65 rated panel suitable for cleanroom where a fully water and dust proof environment is required.

## FEATURES

- Supplied with 1.2m flex & plug
- Low Glare - UGR <19
- Designed to prevent build up of dust
- Tempered glass diffuser
- Sleek & Screwless appearance

## OPTIONS

- Panel sizing options - 595x595mm or 295x1195mm
- DALI-2 Dimmable options available
- Colour rendering options - CRI 80 or CRI 90

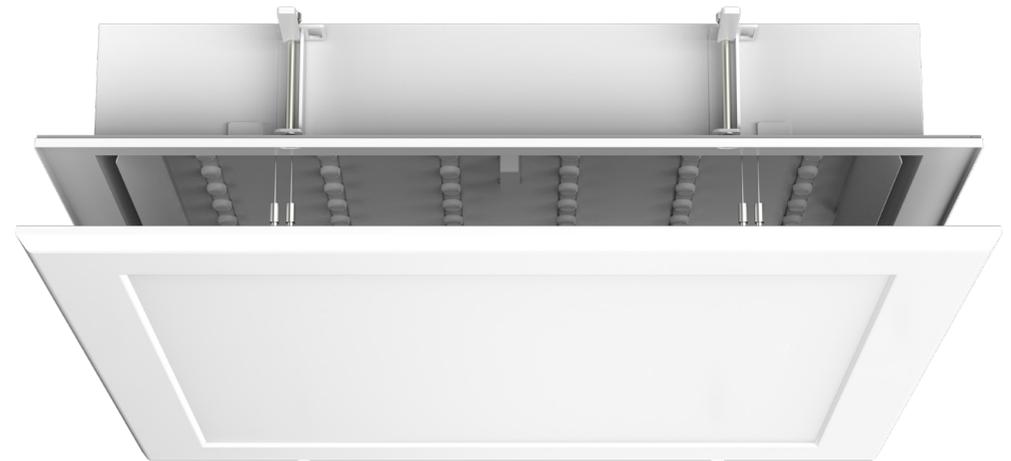

# CLEANROOM PANEL enl-CP384




## PRODUCT RANGE

| Model #                  | CRI | Rated Power (W) | Luminous Flux (lm) | Dimensions(mm) (panel) | Cut Out (mm) | Weight (kg) |
|--------------------------|-----|-----------------|--------------------|------------------------|--------------|-------------|
| enl-CP384-30-8yy-595-SL  | 80  | 30              | 4200               | 595x595x100            | 569 x 569    | 8.1         |
| enl-CP384-30-8yy-1195-SL |     |                 |                    | 295x1195x100           | 269 x 1169   | 8.3         |
| enl-CP384-36-8yy-595-SL  |     | 36              | 5040               | 595x595x100            | 569 x 569    | 8.1         |
| enl-CP384-36-8yy-1195-SL |     |                 |                    | 295x1195x100           | 269 x 1169   | 8.3         |
| enl-CP384-30-9yy-595-SL  | 90  | 30              | 3600               | 595x595x100            | 569 x 569    | 8.1         |
| enl-CP384-30-9yy-1195-SL |     |                 |                    | 295x1195x100           | 269 x 1169   | 8.3         |
| enl-CP384-36-9yy-595-SL  |     | 36              | 4350               | 595x595x100            | 569 x 569    | 8.1         |
| enl-CP384-36-9yy-1195-SL |     |                 |                    | 295x1195x100           | 269 x 1169   | 8.3         |

yy stands for CCT. Use 30 for 3000K, 40 for 4000K, 50 for 5000K  
For DALI-2 Dimmable options, use -DALI at end of Model #

## DIMENSIONS

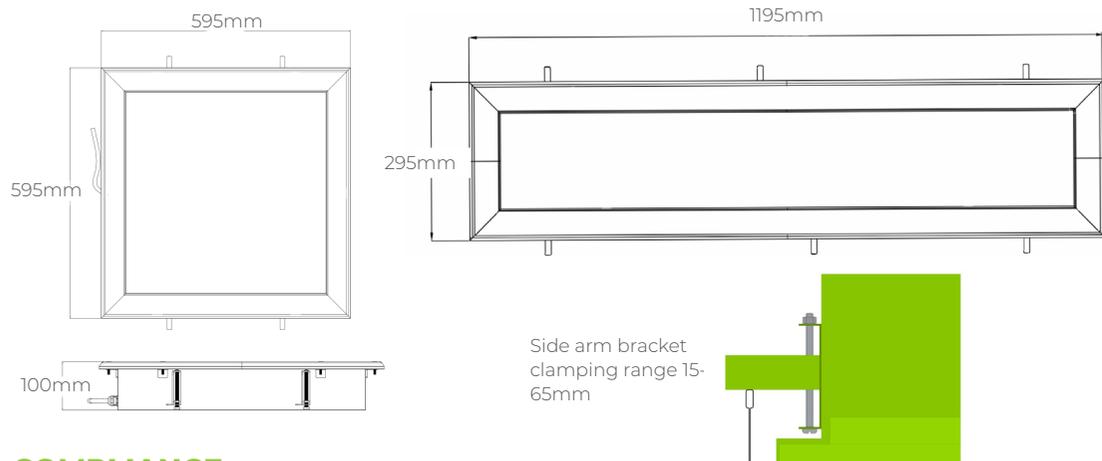

## COMPLIANCE

The enl-CP384 meets all relevant standards and regulatory requirements.



## TECHNICAL INFORMATION

### Optical

|                |                     |
|----------------|---------------------|
| Light source   | LED                 |
| CRI            | Ra>80 or Ra>90      |
| CCT            | 3000K, 4000K, 5000K |
| Beam Angle     | 90°                 |
| Lumen Efficacy | Up to 140lm/W       |

### Electrical

|                               |                       |
|-------------------------------|-----------------------|
| Power consumption             | 30W or 36W            |
| Operating voltage & frequency | 220-240 VAC , 50/60Hz |
| Power factor                  | >0.9                  |

### Environmental

|                             |                 |
|-----------------------------|-----------------|
| IP rating                   | IP65            |
| Ambient temperature range   | -25°C to + 40°C |
| Material Composition (body) | Aluminum        |
| Diffuser Composition        | Tempered Glass  |
| Fixture Colour              | White (RAL9016) |
| <b>Expected Lifespan</b>    | >54,000hrs @L70 |
| <b>Controls - Optional</b>  | DALI-2 Dimming  |
| <b>Warranty*</b>            | 5 years         |

Data subject to change without notice  
\* Refer to warranty policy