

# BOLLARD enl-BD926



The BD926 Bollard provides a stylish architectural luminaire for outdoor applications. It's IP65 and IK08 protection levels makes it perfect for gardens, pathways or courtyards.

## FEATURES

- 100% Aluminium alloy housing
- IP65 - Weather protection
- IK08 - Impact resistance

## OPTIONS

- Clear lens or Frosted lens available
- Heights - 400mm, 750mm or 1000mm




## PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enl-BD926-8yy-400-dd	8	600/610	100(A) x 400(B) x 125(C)	1.2
enl-BD926-8yy-750-dd			100(A) x 750(B) x 125(C)	1.8
enl-BD926-8yy-1000-dd			100(A) x 1000(B) x 125(C)	2.3

yy stands for CCT. Use 30 for 3000K, 40 for 4000K.  
dd stands for Diffuser Type. Use FL for Frosted lens, CL for Clear lens

## DIMENSIONS

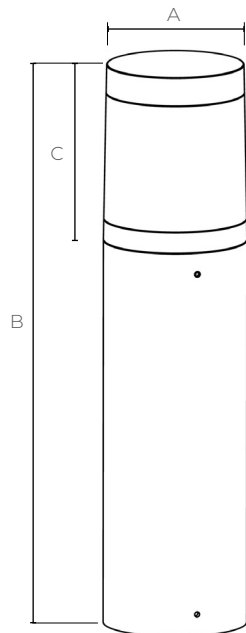

## TECHNICAL INFORMATION

### Optical

Light source	LED
CRI	Ra>80
Beam Angle	320°
CCT	3000K, 4000K

### Electrical

Power consumption (W)	8
Operating voltage & frequency	220-240 VAC 50 Hz
Power factor	>0.88

### Environmental

IP rating	IP65
Impact rating	IK08
Ambient temperature range	-20°C to + 45°C
Material Composition (body)	PC/Aluminium
Fixture Colour	Black (RAL9005)

**LED Lifespan** >54,000hrs @L70

**Warranty\*** 5 years

Data subject to change without notice  
\* Refer to warranty policy

## COMPLIANCE

The enl-BD926 meets all relevant standards and regulatory requirements.

