

BOLLARD enl-BD926



The BD926 Bollard provides a stylish architectural luminaire for outdoor applications. It's IP65 and IK08 protection levels makes it perfect for gardens, pathways or courtyards.

FEATURES

- 100% Aluminium alloy housing
- IP65 - Weather protection
- IK08 - Impact resistance

OPTIONS

- Clear lens or Frosted lens available
- Heights - 400mm, 750mm or 1000mm




PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enl-BD926-8yy-400-dd	8	600/610	100(A) x 400(B) x 125(C)	1.2
enl-BD926-8yy-750-dd			100(A) x 750(B) x 125(C)	1.8
enl-BD926-8yy-1000-dd			100(A) x 1000(B) x 125(C)	2.3

yy stands for CCT. Use 30 for 3000K, 40 for 4000K.
dd stands for Diffuser Type. Use FL for Frosted lens, CL for Clear lens

DIMENSIONS

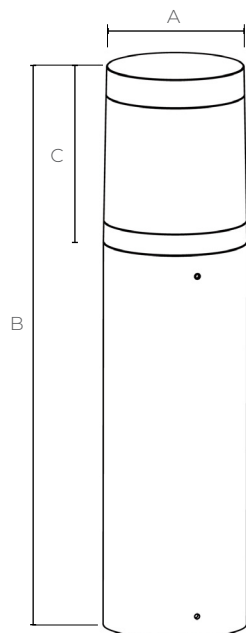

TECHNICAL INFORMATION

Optical

Light source	LED
CRI	Ra>80
Beam Angle	320°
CCT	3000K, 4000K

Electrical

Power consumption (W)	8
Operating voltage & frequency	220-240 VAC 50 Hz
Power factor	>0.88

Environmental

IP rating	IP65
Impact rating	IK08
Ambient temperature range	-20°C to + 45°C
Material Composition (body)	PC/Aluminium
Fixture Colour	Black (RAL9005)

LED Lifespan >54,000hrs @L70

Warranty* 5 years

Data subject to change without notice
* Refer to warranty policy

COMPLIANCE

The enl-BD926 meets all relevant standards and regulatory requirements.

