

# TUBULAR LIGHT enl-TL366



The TL366 is a robust IP66 luminaire suitable for agricultural, manufacturing and other applications that require a fully sealed light that undergoes regular cleaning.

## FEATURES

- Efficacy up to 140 lm/W
- IP66 - Ingress Protection
- IP69K - Able to be washed down with high pressure water
- 316 stainless steel & PMMA Housing

## OPTIONS

- Suspension mounting available
- Linkable solution available
- DALI-2 Dimming controls available



# TUBULAR LIGHT enl-TL366




## PRODUCT RANGE

Model #	Rated Power (W)	Luminous Flux (lm)	Dimensions (mm)	Weight (kg)
enl-TL366-30-1200-8yy-zz	30	4200	1178x84	1.62
enl-TL366-40-1200-8yy-zz	40	5600		


yy stands for CCT. Use 40 for 4000K or 50 for 5000K

zz stands for Beam Angle

## DIMENSIONS

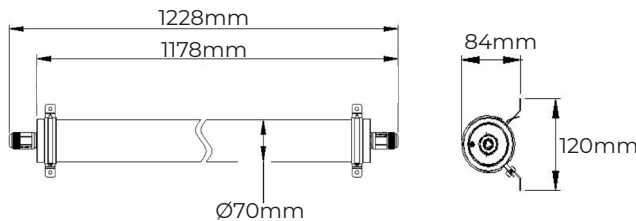

## PHOTOMETRICS

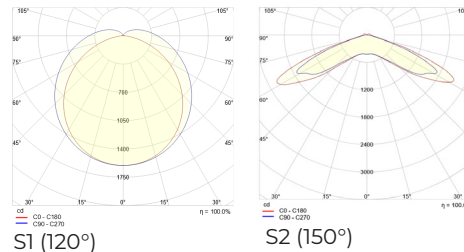

## MOUNTING OPTIONS

Name	Item Code	Item Description
Suspension Mounting Cable	enl-TL366-SC	Allows for fitting to be suspended from ceiling

## COMPLIANCE

The enl-TL366 meets all relevant standards and regulatory requirements.



## TECHNICAL INFORMATION

### Optical

Light source	LED
CRI	Ra>80
CCT	4000K (5000K optional)
Beam Angle	120° (S1) or 150° (S2)
Luminaire efficacy	Up to 140lm/W

### Electrical

Power consumption	30W / 40W
Operating voltage & frequency	200-240VAC, 50/60 Hz
Power factor	> 0.9

### Environmental

IP rating	IP66 & IP69K
IK rating	IK06
Ambient temperature range	-30°C to +40°C
Material Composition (body)	Aluminium alloy
Material Composition (bracket / end caps)	316 Stainless steel
Material Composition (outer shell)	PMMA (anti corrosion cover)

### LED Lifespan

### Warranty\*

>124,000hrs @L80B50

5 years

Data subject to change without notice

\* Refer to warranty policy